

**INFO**

Available frame:	White; Bone; Black; Chrome; Gold (only 1 supplied)
CABLE LENGHT (Controller):	1,5 mt (6 x 2,5)
DEGREE OF PROTECTION:	IP44
NORMS:	EN 10133—EN 55032—EN 55024



#### SINGLE BUTTON VERSION

Flush Switch with a homely design and intuitive operation suitable for any user.

Even entertaining the occasional guest will not mean embarrassing and unavoidable explanations about how to use the toilet.

This control panel causes the toilet to flush automatically, leaving a certain amount of water in the bowl.

## INSTALLATION

### STANDARD WALL SWITCH:

- Fix with the supplied screws in a hidden place (**possibly, guarantee the ease of access for maintenance**)
- Connect the plugs (see diagram)


### SET THE WATER LEVEL

RECOMMENDED WATER AMOUNT (LEVEL) IS ABT. 1CM ABOVE THE TOILET'S DRAINAGE HOLE AT THE END OF "BEFORE USE" FUNCTION (DOUBLE BUTTON VERSION) OR WHILE UNATTENDED (SINGLE BUTTON / FAMILY VERSION).


TUNE THE KNOB AT THE BACK OF THE PANEL TO REDUCE OR EXTEND THE TIMING FOR WATER INLET



### CONNECTIONS (SIMPLIFIED)

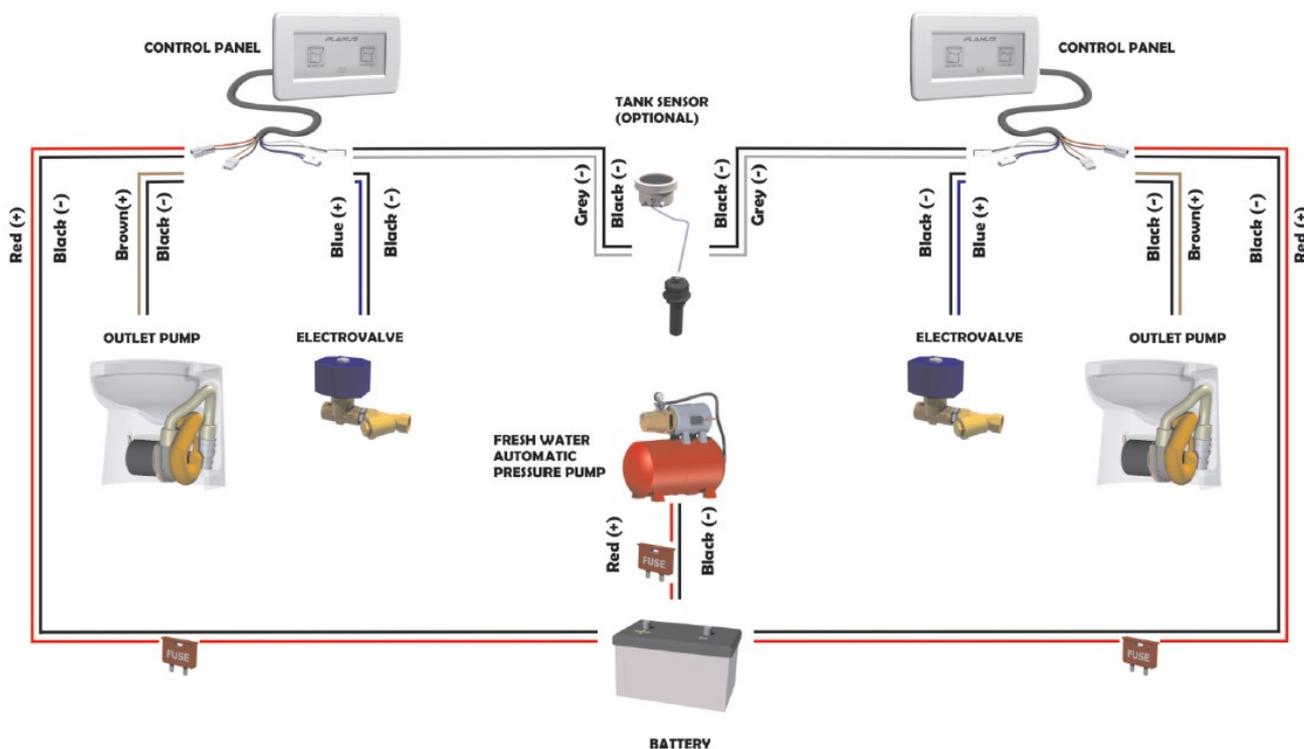


12/24Vdc DIAGRAM

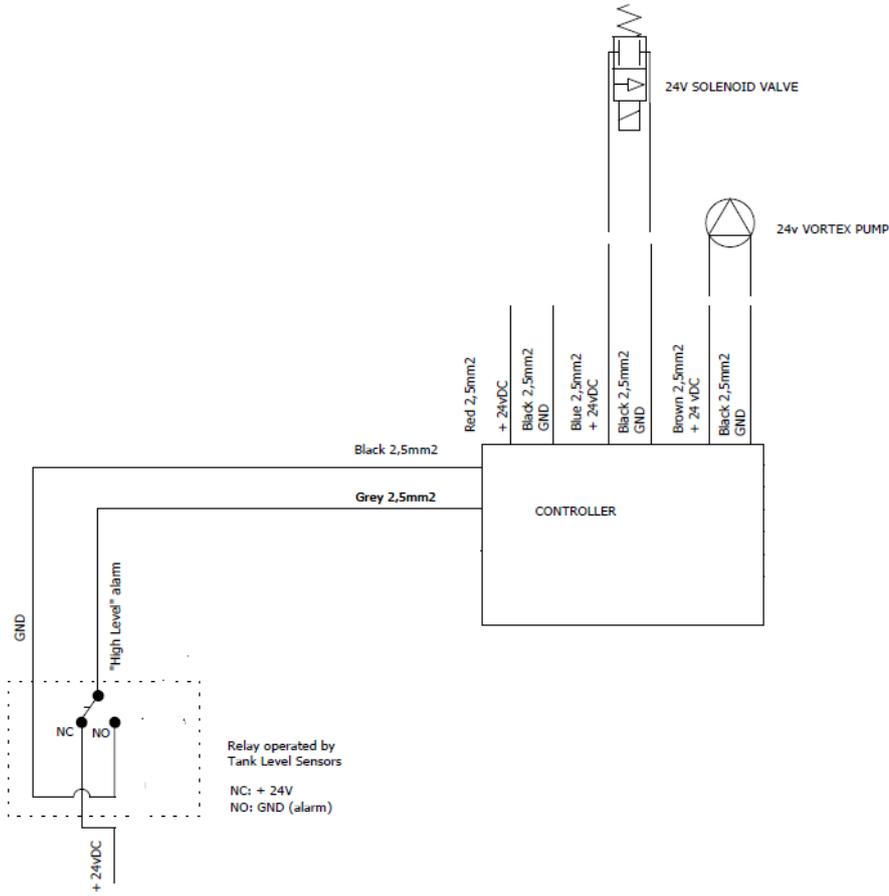



230Vac DIAGRAM

NOTE: for 230Vac systems an additional TRANSFORM BOX item (PW.030.00) is supplied with toilets.

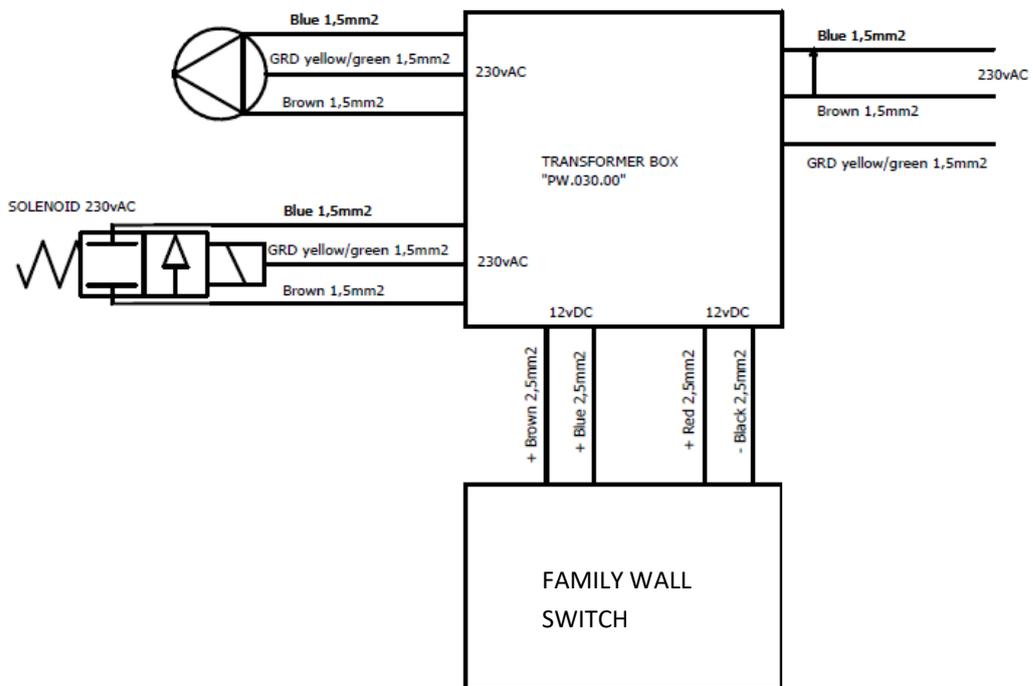



**DIMENSIONS**

**STANDARD Wall  
Switch**

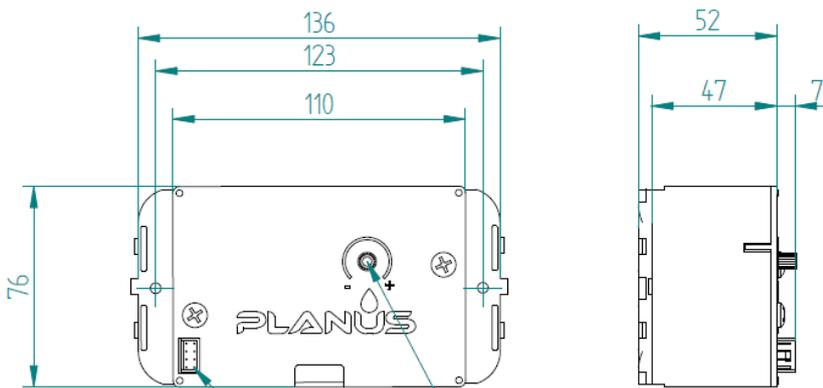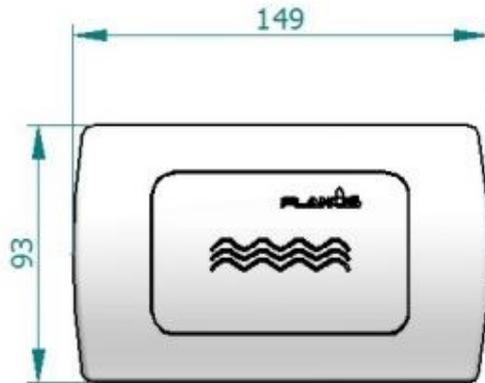

To TOUCH or SLIM wall switch

KNOB to set water level

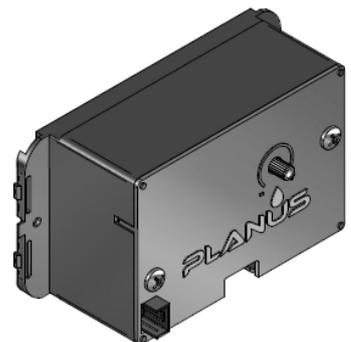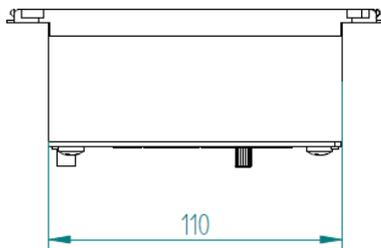

[www.planus.eu](http://www.planus.eu)

